



**SANWAYAUDIO**

<https://www.china-sanway.com>

# 12W75-8

## Electrical Parameters

Re	5.36 Ohm
Krm	0.0026 Ohm
Erm	0.82
Kxm	0.0137 Ohm
Exm	0.71
Cmes	184.04 $\mu$ F
Lces	54.63 mH
Res	253.04 Ohm
fs	50.2 Hz



## Mechanical Parameters

(using laser)


Mms	61.3 g
Mmd (Sd)	47.476 g
Rms	1.316 kg/s
Cms	0.164 mm/N
Kms	6.1 N/mm
Bl	18.251 N/A
Lambda s	0.052

## Loss factors

Qtp	0.321
Qms	14.687
Qes	0.311
Qts	0.305

## Other Parameters

Vas	65.4313 l
n0	2.556%
Lm	96.28 dB
Lnom	98.01 dB
rmse Z	2.58%
rmse Hx	1.29%
Series resist	0 Ohm
Sd	530.93 cm <sup>2</sup>

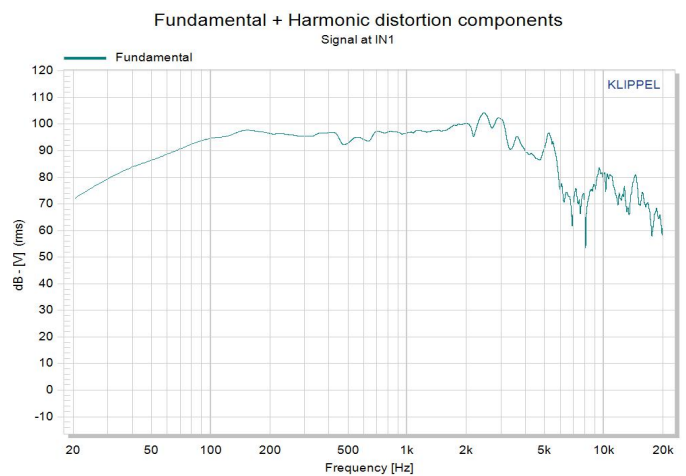

<https://www.china-sanway.com>